

SERIES 70

ELECTRIC ACTUATORS



 **Bray**[®]

BRAY.COM

THE HIGH PERFORMANCE COMPANY

1 Enclosure

The low profile weatherproof enclosure is UL listed Type 4, 4x and IP65. Polyester powder coated die-cast aluminum cover and base, for exceptional corrosion, wear, impact and ultraviolet resistance.

2 High Visibility Position Indicator

Prominently labeled and color coded yellow for open, red for close – the display indicates valve position through the full range of travel. The O-ring sealed dome is made of high impact, heat, chemical and ultraviolet resistant clear polycarbonate and designed to withstand caustic wash down ensuring excellent corrosion protection.

3 Captive Cover Bolts

The cover is attached to the base by captive stainless steel bolts placed outside the sealing area.

4 O-Ring Seal For Watertight Enclosure

The O-ring seal between the cover and base provides a weatherproof seal preventing internal corrosion.

5 Manual Override

Standard on all models. The declutchable manual override prevents handwheel movement during motor operation. When manual operation is desired, pull the handwheel out to expose the yellow stripe around the handwheel shaft, which indicates the handwheel is engaged and manual operation is available.

6 Manual Override Switch

Interrupts power to the motor when handwheel operation is engaged.

7 Conduit Entries

Two connections in either NPT or metric threads. One entry is for power, the other for control wiring.

8 Motor Gear

High torque start motor assembly, designed for fast inspection and maintenance.

9 Output Drive

Self-locking worm shaft and worm gear assembly holds the valve in desired position.

10 Mechanical Travel Stop Bolts

Designed to prevent over-travel in the open or close direction during manual operation. Travel stop bolts include a locknut to prevent loosening, seals to prevent water ingress, and spacers to prevent adjustment between 0° and 90° limit switch settings. Travel stop bolts permit 5° of over travel.

11 Terminal Strip

Actuator limit switches are pre-wired to an easily accessible and clearly marked terminal block for customer wiring. The terminal strip has been placed near the two conduit entries with ample room for running wire leads. An easily accessible green plated ground screw is provided. A wiring diagram is included inside the cover for easy reference.

12 Limit Switch Bracket

Simple and secure design to firmly hold limit switch assemblies for accurate and repeatable valve position feedback.

13 Limit Switch CAMs


Bray's patented CAM design includes standard green (open) and red (close) CAMs which are adjustable with finger touch or screwdriver. No additional tools necessary. Standard factory setting allows 90° travel between open and close positions.

14 Roller Bearing

Provides low friction while securely aligning actuator indicator shaft and CAMs for reliable valve position feedback.

15 Oldham Coupler

Corrects any misalignment between the valve and actuator without introducing side load to the position indicator shaft assembly.

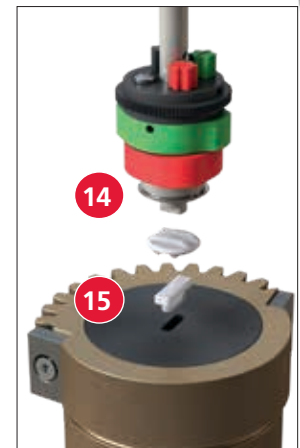


16 Standard Actuator Control Interposing Relay Board (I.R.B.)


120/220 VAC 50/60Hz On/Off control

17 Optional Actuator Controls Servo NXT Modulating Controller

120, 220, 24 VAC 50/60 Hz, 1 phase 24 VDC

24V On/Off Controller
(not shown)

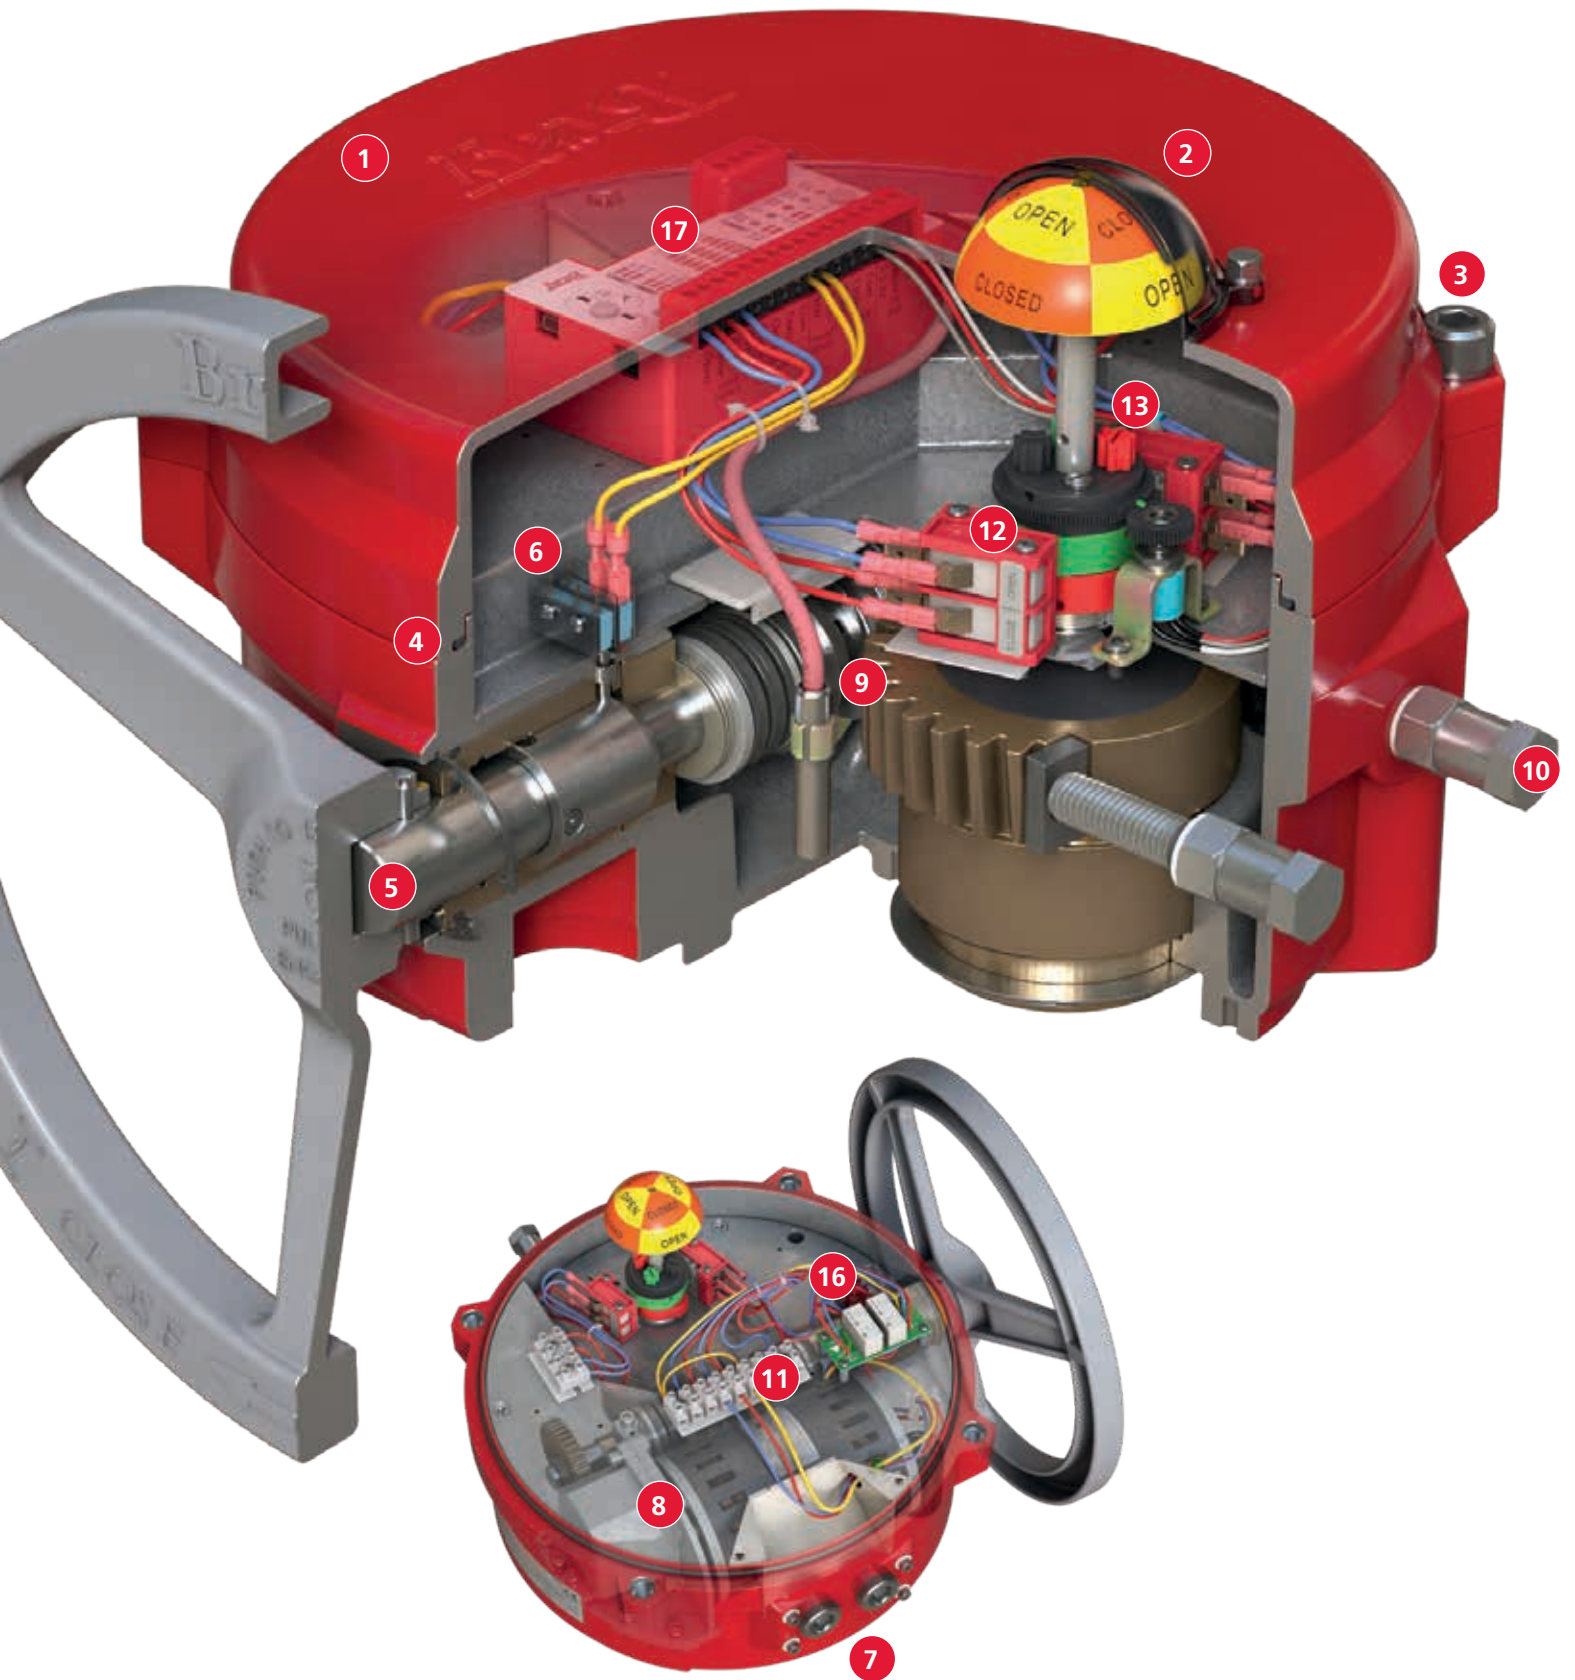

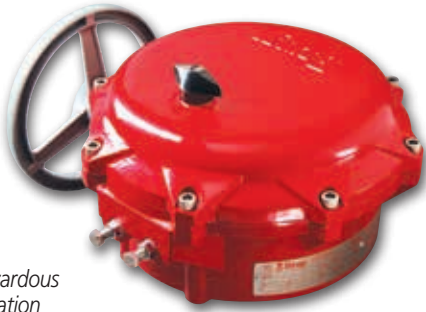

Hazardous Location



Sizes 130-180


Bray's Series 70 electric actuator has many advantages over other actuators including:

- Voltages: 120, 220, 24VAC 50/60 Hz, 1-phase, 24VDC
- Output torque 300 lb-in (34 Nm) to 18,000 lb-in (2,034 Nm)
- UL, CSA and CE certification on most units
- Low profile, light weight
- High visibility position indicator
- Simple manual override handwheel system
- On-off or modulating control
- Terminal strip for cable terminations
- Hand or screw driver adjustment of travel limit cams
- ISO 5211 for direct mounting
- Optional hazardous location model available
- Optional Seacorr coating for harsh environments



Sizes 003-065



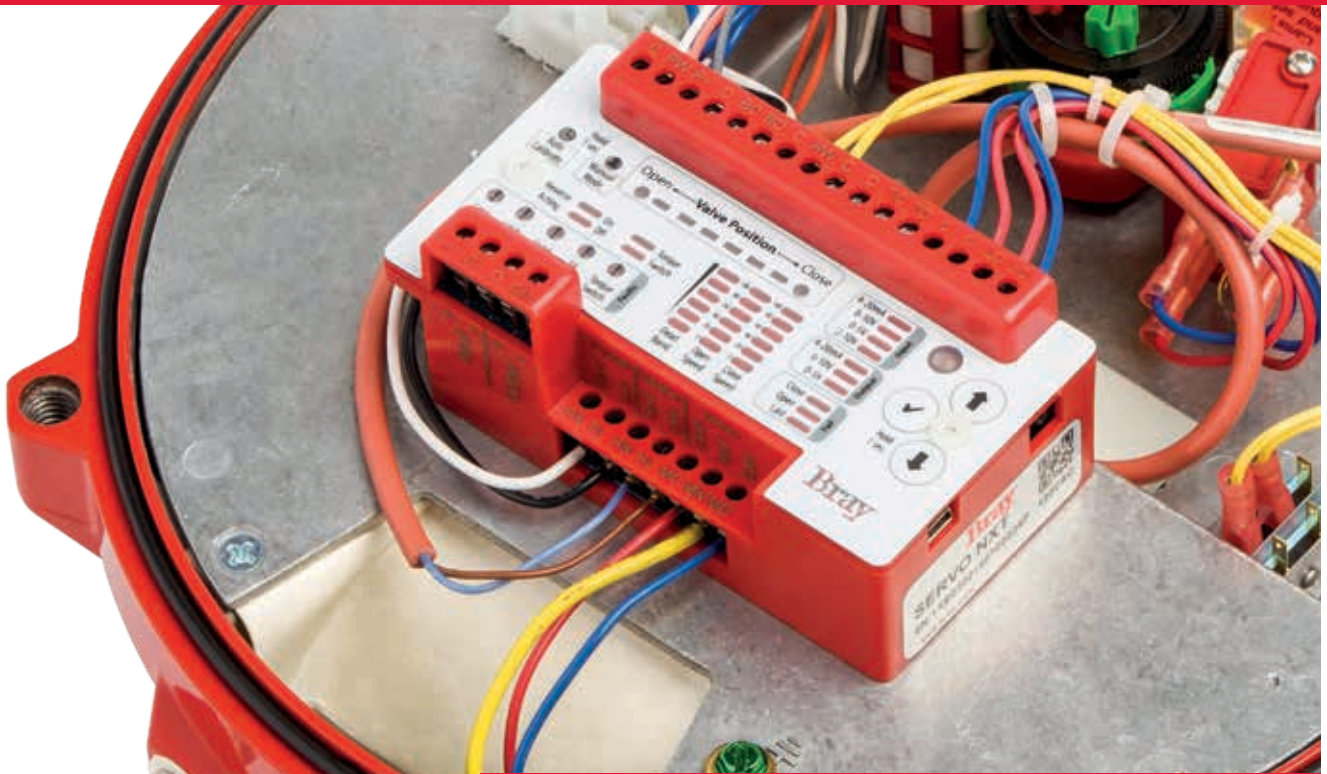

SERVO NXT FEATURES / SPECIFICATIONS

Servo is available for modulating service, continuous duty actuators only.

The Servo NXT offers precise modulating service for accurate position control.

- One touch automatic calibration
- User-friendly interface
- Advanced control of proportional band and dead band
- Automatic pulsing mode for precise positioning
- Self diagnostics
- Action on loss of command signal
- Go to position commands

Actuator Voltage	120, 220, 24 VAC 50/60 Hz, 1 phase 24 VDC
Input Signal	Configurable 4-20 mA, 0-10, 2-10, 0-5 VDC
Retransmission signal	Configurable 4-20 mA, 0-10, 0-5 VDC
Independent Isolation	Control signal input and output Control signals and power
Display	Menu driven auto dimming LED
Menu Navigation	Up/Down arrows with select (✓) buttons
Configuration	Menu selectable to non-volatile memory
Calibration	Auto calibration sequence for travel limits
Deadband	Configurable 1% - 6%
Reverse Acting	Configurable for inverted input signal
Speed Control	Independent for open and close direction
Fail Position (loss of input signal)	Configurable close, open, last
Manual Mode	Local operation via Servo NXT user interface
Fault Indications	Loss of command signal Limit switch Handwheel engaged Feedback pot Torque switch Jammed valve / motor stalled
Health Monitor	Heartbeat - Backlit blinking Bray logo


"Configurable" means the customer, or the factory, can modify the Servo NXT.


1 Control Station

The optional control station features a local-off-remote control switch, an open-stop-close switch, and two lights which locally indicate open and close valve position. This weatherproof aluminum enclosure is easily bolted to the four mounting holes located on the S70 conduit entry panel. The Control Station cover includes captive bolts and may be rotated in 90° increments allowing the customer to easily operate and view the control station. Two ¾" NPT cable entries are available in the control station base. Two different multi-pin, weatherproof electrical cable connections are also available.


2 Battery Backup Unit (BBU)

Designed for use with 24V actuators, the optional BBU provides power to permit the actuator to reach its fail-open or fail-close position in the event of a main power failure. Upon reaching the fail position, the BBU turns off until external power is restored. After main power has been restored, the actuator returns to normal operation.

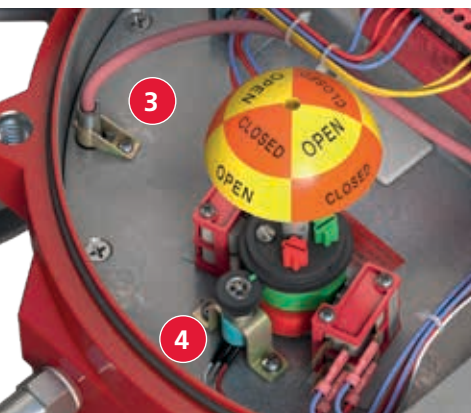
3 Heater

Mounted on the actuator switch plate, a self-regulating heater can be added to prevent potential electrical component damage due to condensation build-up inside the actuator.

4 Potentiometer

Optional gear driven 10k ohm potentiometer provides continuous position feedback for a customer control system. Potentiometer is standard with the Servo NXT controller.

5 Auxiliary Switches

Up to four additional dry-contact (voltage free) SPDT mechanical switches can be added to indicate travel position for remote customer control systems.

6 Torque Switch

Optional torque switches provide protection for the automated valve assembly in the event of an over-torque event.

7 Electrical Cable Connections

Pre-wired multi-pin weatherproof cable receptacles allow quick-connect field installation and prevent internal cabling errors which could occur during commissioning. Cord sets can be supplied with connection/flying leads or connection/connection on cord set ends to plug directly into the actuator receptacle.



Optional Seacorr coating

		S70-003	S70-006	S70-008* S70-708*	S70-012* S70-712*	S70-020* S70-720*	S70-030	S70-050	S70-065	S70-130	S70-180
Torque	lb-in	300	600	800	1200	2000	3000	5000	6500	13000	18000
	Nm	34	68	90	136	226	339	565	734	1469	2034
ISO Mounting Base		F07	F07	F07/F12	F07/F12	F07/F12	F12/F16	F12/F16	F12/F16	F12/F16	F12/F16
Weight (Approximate)	lbs	11	11	25	25	25	45	45	45	118	118
	kg	5	5	11	11	11	20	20	20	54	54

MANUAL OVERRIDE											
Handwheel Dia.	in	3.5	3.5	8	8	8	12	12	12	12	12
	mm	89	89	203	203	203	300	300	300	300	300
Gear Ratio		30:1	30:1	30:1	30:1	30:1	30:1	30:1	30:1	90:1	90:1
Rim Pull	lbs	16	32	18	28	46	37	62	80	80	80
	kg	7.2	14.5	8.2	12.7	20.8	16.8	28.1	36.3	36.3	36.3

*Hazardous Location Units

120VAC

Travel Time 90° (Sec)		S70-003		S70-006		S70-008* S70-708*		S70-012* S70-712*		S70-020* S70-720*		S70-030		S70-050		S70-065		S70-130		S70-180			
		Current Draw in Amps																					
60 Hz	50 Hz	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA		
10	12					1.20	2.10	1.40	2.30														
15	18					0.78	2.10	1.20	2.10	1.70	2.30												
18	22											1.80	3.00	2.30	3.10								
30	36	0.60	1.00	0.80	1.00	0.60	2.10	0.78	2.10	1.00	2.10	1.20	3.00	1.60	3.00	2.30	3.10						
110	132																			2.30	3.10	2.50	3.10

*Hazardous Location Units

220VAC

Travel Time 90° (Sec)		S70-003		S70-006		S70-008 S70-708		S70-012 S70-712		S70-020 S70-720		S70-030		S70-050		S70-065		S70-130		S70-180			
		Current Draw in Amps																					
60 Hz	50 Hz	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA		
10	12					0.50	0.76	0.60	0.81														
15	18					0.38	0.90	0.50	0.76	0.55	0.90												
18	22											0.78	1.40	1.10	1.40								
30	36	0.60	0.75	0.65	0.75	0.38	0.90	0.45	0.90	0.50	0.81	0.75	1.2	0.90	1.40	1.10	1.40						
110	132																			1.30	2.70	1.50	2.70

FLA - Full Load Amperage

LRA - Locked Rotor Amperage

24VAC

Travel Time 90° (Sec)		S70-006	S70-020	S70-050
		Current Draw in Amps		
60 Hz	50 Hz	FLA	FLA	FLA
60	72	1.80	2.00	4.00

24VDC

Travel Time 90° (Sec)		S70-006	S70-020	S70-050
		Current Draw in Amps		
		FLA	FLA	FLA
40		1.80		
60			2.00	4.00


Travel Time - Motors

30, 40, 60, 110 second motors are continuous duty
10, 15, 18 second motors are intermittent duty

For all other information such as dimensional drawings, wiring diagrams, and EDS files please visit bray.com or contact your local Bray representative.



THE HIGH PERFORMANCE COMPANY

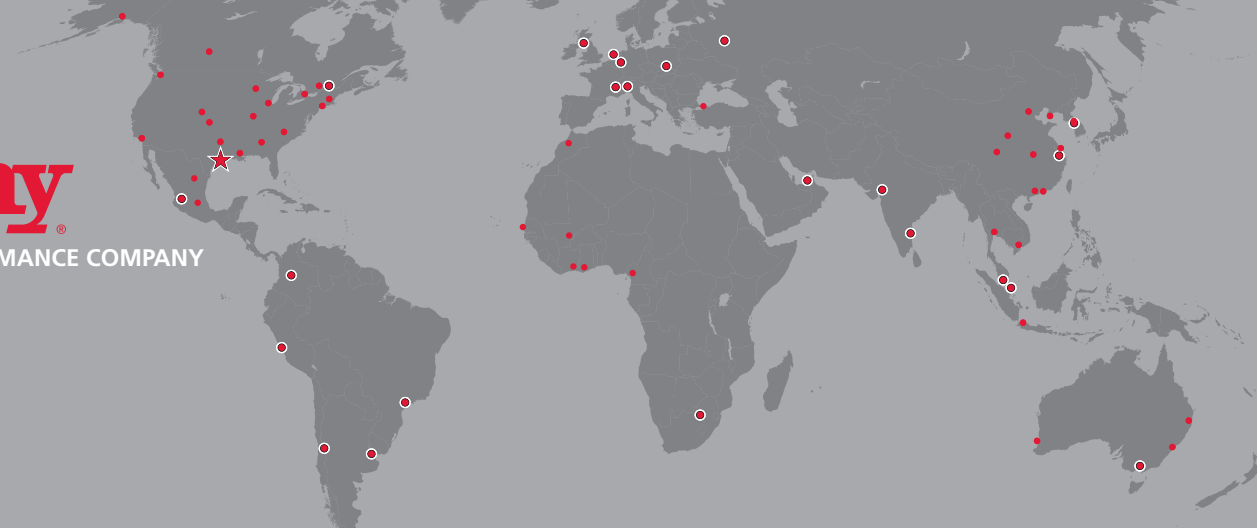

BRAY INTERNATIONAL PRIMARY SALES AND SERVICE LOCATIONS

USA Houston, Texas	CHINA Hangzhou, Zhejiang	MEXICO Zapopan, Jalisco	RUSSIA Moscow
AFRICA Johannesburg	COLOMBIA Bogotá	MIDDLE EAST Dubai	SINGAPORE Ubi Techpark
BENELUX Heerhugowaard	FRANCE Voiron	PACIFIC Melbourne, Australia	SOUTH KOREA Seoul
BRAZIL Paulinia, Sao Paulo	GERMANY Krefeld	PERU Lima	SOUTHEAST ASIA Malaysia
CANADA Montreal	INDIA Vadodara	POLAND Oświęcim	UNITED KINGDOM Glasgow
CHILE Santiago	ITALY Milano		

FLOW-TEK

USA Houston, Texas
BRAZIL Paulinia, Sao Paulo
CHINA Hangzhou, Zhejiang

RITE CORPORATION

CANADA Montreal

VALVTRONIC

ARGENTINA Buenos Aires

AMRESIST

USA Houston, Texas

BRAY/VAAS

INDIA Chennai

KUGELHAHN MÜLLER

GERMANY Krefeld

HEADQUARTERS

Bray International, Inc.
 1333 Westland East Blvd.
 Houston, Texas 77041
 Tel: 281.894.5454
 bray.com

All statements, technical information, and recommendations in this bulletin are for general use only. Consult Bray representatives or factory for the specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved. Patents issued and applied for worldwide.

Bray® is a registered trademark of Bray International, Inc.

© 2017 Bray International. All rights reserved.

B-1053_EL_Series 70_5_2018